PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :	Δ1	(11) International Publication Number	: WO 99/67677
G02C 7/10, 7/12		(43) International Publication Date:	29 December 1999 (29.12.99)

(21) International Application Number: PCT/SE99/00938

(22) International Filing Date: 31 May 1999 (31.05.99)

(30) Priority Data:

9802009-2

5 June 1998 (05.06.98)

SE

(71)(72) Applicant and Inventor: STEHAGER, Torbjörn, V. [SE/SE]; Dagsverksvägen 21, Lugnet 1, S-134 65 Ingarö (SE).


(74) Agents: SUNDSTRÖM, Per et al.; Stenhagen Patentbyrå AB, P.O. Box 4630, S-116 91 Stockholm (SE). (81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

In English translation (filed in Swedish).

(54) Title: EYEGLASSES WITH MODIFIED LIGHT TRANSMISSION

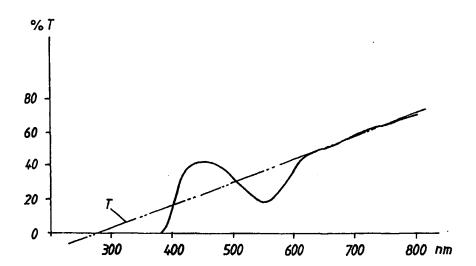

(57) Abstract

Eyeglasses which function to make contours and light coloured objects to stand out more clearly in a range of vision or field of view that is dominated by green vegetation, wherein the lenses of said eyeglasses have a light transmission which varies with the wavelength of the light. The transmission essentially follows a straight line T=K $\lambda-t$, where K is the gradient of the line and is from 0.13 \pm 0.03, λ is the wavelength in nm, t lies in the range of 5-30 % units and T denotes the transmission in %-units, wherein the transmission follows the straight line T when λ is > 620 nm. Transmission beneath 620 nm follows a curve that intersects the line T roughly at 400 and 500 nm and the curve takes a maximum which lies 5-30 % units above T at 450 nm and 5-30 % units beneath T at 550 nm. The lens also has a horizontal polarisation filter facility.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
M	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
ΑT	Austria	FR	France	LU	Luxembourg	SN	Senegal
ΑU	Australia	GA	Gabon	ĹV	Latvia	SZ	Swaziland
ΑZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea :	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	. Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	1E	Ireland	MN	Mongolia	ÜA	Ukraine
BR	Brazil	ΙL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	is	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
СН	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ.	New Zealand	211	Zimozowe
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

WO 99/67677 PCT/SE99/00938

EYEGLASSES WITH MODIFIED LIGHT TRANSMISSION.

The present invention relates to eyeglasses of the kind defined in the preamble of Claim 1.

5 .

10

Thus, the invention relates to eyeglasses that function to make contours stand out more clearly and distinctly to the wearer and to enable the wearer to discern light-coloured objects more easily, in a range of vision that is dominated predominantly by green coloured vegetation, said eyeglasses having a light transmission that varies with the wavelength of said light.

The inventive eyeglasses are particularly intended to enable
a golfer to discern the contour curvature and slope of grasscovered ground sharply and clearly, and also to enable a golf
ball lying in grass, rough vegetation and other places to be
discovered more easily.

- It is well known, for instance from US-A-5,157,426, that certain informatory details in an environment dominated by green vegetation can be identified more easily when wearing eyeglasses that have significantly reduced light transmission over essentially the whole of the sequence band discerned by the human eye, with the exception of the infrared range (wavelengths longer than 700 nm) and to a limited extent in the blue/green and blue/violet ranges (500-520 nm and shorter than 435 nm respectively).
- DE-A1-31 13 833 teaches eyeglass lenses having light transmission in a narow range near the infrared limit only.

 DE-A1-35 34 575 teaches eyeglass lenses for colour contrast amplification with reduced transmission in respect of

wavelengths above 720 nm and in respective wavelengths that lie between 550 and 600 nm.

Although these known devices provide some advantages with respect to facilitating identification of certain elements in a green environment, none of said devices provides a fully satisfactory solution to the difficulties experienced by golfers in particular when they shall strike a golf ball or identify a golf course contour.

10

15

5

Accordingly, an object of the invention is to provide eyeglasses that will enable, for instance, a golfer to identify contours and light-coloured objects such as a golf ball more easily in a range of vision or field of view that is dominated by green vegetation.

This object is achieved with eyeglasses constructed in accordance with the accompanying Claim 1.

Further embodiments of the invention are set forth in the accompanying dependent Claims.

Fundamentally, the invention can be considered to lie in the lens having a special frequency-dependent transmission, and in the lens also including a horizontal polarisation filter. A particularly favourable embodiment of the invention can be achieved by combining a commercially available colour compensation filter, Kodak Wratten filter, Magenta CC 40 M, with a commercially available horizontal polarisation filter, Polaroid HN 32. A common feature of these filters is that they both have a transmission curve according to Claim 1,

with t = -20%-units and curve deviations of 20%-units from the straight line T at 450 and 550 nm respectively.

According to a further development of the invention, two such Kodak Wratten filters can be combined with a Polaroid HN 32 filter.

The invention will now be described by way of example with reference to the accompanying drawing, in which

10

Fig. 1 is a graph illustrating the wavelength-dependent transmission of an inventive eyeglass lens according to a first embodiment; and

Fig. 2 is a graph illustrating the transmission of a lens according to another embodiment.

Fig. 1 illustrates a transmission curve for a lens of inventive eyeglasses.

20

25

30

The inventive lens also has horizontal polarisation. It will be seen that the transmission curve can be approximated by a straight line T, wherewith the transmission follows the line T at frequencies >620 nm, and that the line T has a gradient k = 0.13 and intersects the abscissa at 380 nm. It will also be seen that the curve falls steeply towards 0 (zero) at wavelength 400 nm and intersects the line T at 400 and 500 nm and lies on the line T at 600 nm. Deviation of the curve from the line T is 20% units above T at 450 nm and 20% units beneath T at 500 nm. It will be seen that the transmission is about 80% at 800 nm.

Fig. 2 shows a transmission curve where the straight line T has a gradient of 0.13 and intersects the abscissa at roughly 330 nm, and that the transmission is about 62% at 800 nm. The transmission falls steeply towards 0 (zero) at 400 nm. The transmission curve intersects the line T at 400 nm and in the region of 500 nm and lies on the line T at 620 nm and follows the line T at greater wavelengths. In the case of the Fig. 2 embodiment, the curve lies at a maximum of 15% units above the line T at roughly 450 nm and the curve minimum lies at 20% units beneath the line T at roughly 550 nm.

It will be obvious to the person skilled in this art that the transmission curve can be displaced upwardly and downwardly to some extent in both of the graphs shown, without

detracting from the inventive effect. It will also be understood by the skilled person that the slope of line T can be changed within certain limits and that the curves may be displaced horizontally within certain limits without losing the favourable inventive effect.

20

5

10

The eyeglass lens shall have a horizontal polarisation in both of the embodiments shown in Figs. 1 and 2.

In the case of commercial polarisation filters, these filters

have a certain wavelength-dependent transmission modifying

effect in addition to said polarisation effect.

Fig. 1 shows the resultant transmission for Kodak Wratten filter No. 40, Magenta CC 40 M, together with a polarisation filter Polaroid HN 32.

30


WO 99/67677 PCT/SE99/00938


Fig. 2 illustrates the resultant combined transmission for an inventive eyeglass lens that includes two such Kodak Wratten filters and one such Polaroid filter.

It will be evident from Figs. 1 and 2 that the light transmission follows a generally sinusoidal curve that has a period of about 200 nm from 400 nm to 600 nm relative to the straight line T.

CLAIMS

- Eyeglasses for enabling contours and light-coloured objects to stand out more clearly and more distinctly in a range of vision or field of view that is dominated by green 5 vegetation, wherein the eyeglasses include lenses whose light transmission varies with the wavelength of the light, characterised in that said transmission essentially follows a straight line $T = K \lambda - t$, where K is the gradient of the line and is from 0.13 \pm 0.03, λ is the wavelength in nm, t 10 lies in the range of 5-30% units and T denotes the transmission in %-units, wherein the transmission follows the straight line T when λ is >620 nm; in that transmission beneath 620 nm follows a curve that intersects the line T roughly at 400 and 500 nm; in that the curve has a maximum 15 which lies 5-30% units above T at 450 nm and 5-30% units beneath T at 550 nm; and in that the lens also has a horizontal polarisation filter facility.
- 2. Eyeglasses according to Claim 1, characterised in that the transmission is negligibly low at frequencies beneath about 180 nm.

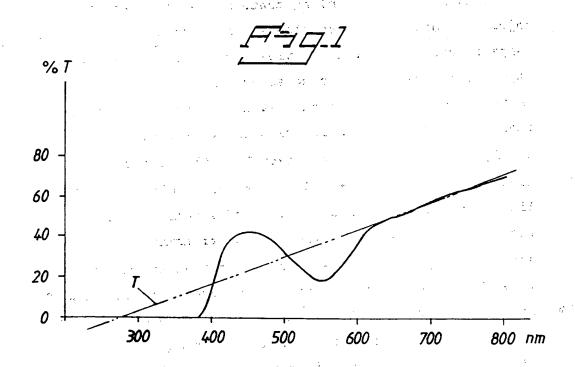

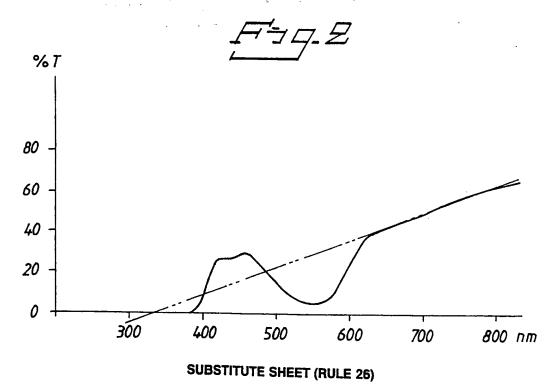

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/00938

	<u></u>						
A. CLASSIFICATION OF SUBJECT MATTER							
IPC6: G02C 7/10, G02C 7/12 According to International Patent Classification (IPC) or to both national classification and IPC							
B. FIELDS SEARCHED							
Minimum documentation searched (classification system followed by classification symbols)							
	execute trade seatched (classification system followed by	y classification symbols	i). , , , , , , , , , , , , , , , , , , ,				
IPC6:	G02C						
Documenta	tion searched other than minimum documentation to the						
ŧ .		e extent that such docu	ments are included in	the fields searched			
SE,DK,	FI,NO classes as above	* . * * * *					
Electronic d	lata base consulted during the international search (name	of data base and who	re practicable sparel	terms used)			
		· · · · ·	re praedeante, sexici	i terms useu)			
EPODOC				·			
C. DOCU	MENTS CONSIDERED TO BE RELEVANT						
Category*							
	Gtation of document, with indication, where ap	propriate, of the rele	vant passages	Relevant to claim No.			
							
			*				
			•				
·	'	: .					
	·· .						
		ŕ	·				
	r ,						
	54 -						
				•			
Further documents are listed in the continuation of Box C. See patent family annex.							
* Special	categories of cited documents:	"I" later document	nublished after the inte	emational Gline data on			
"A" document defining the general state of the art which is not considered to be of particular relevance "I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention							
	ocument but published on or after the international filing date						
"L" document which may throw doubts on priority claim(s) or which is considered novel or cannot be considered to involve an inventive							
cited to establish the publication date of another citation or other special reason (as specified) "Y" document of particular relevance: the claimed invention cannot be							
"O" document	ent referring to an oral disclosure, use, exhibition or other	considered to i	nvolve an inventive ster	when the document is			
"P" docum	ent published prior to the international filing date but later than	being obvious	combined with one or more other such documents, such combination being obvious to a person skilled in the art				
	only date claimed	"&" document men	iber of the same patent	family			
Date of the actual completion of the international search Date of mailing of the international search report							
17 Aug	ust 1999	8 Octob	per 1999 (0	8.10.99)			
Name and mailing address of the ISA Authorized officer							
Swedish Patent Office Box 5055, S-102 42, STOCKHOLM							
Facsimile	Box 5055, S-102 42 STOCKHOLM Igor Gazdik/CF Telephone No. + 46 8 686 02 86 Telephone No. + 46 8 782 75 00						
Taleshinie No. + 46 8 666 02 86 Telephone No. + 46 8 782 25 00							